


HWDK-C

Waterdicht armatuur
Waterproof fitting

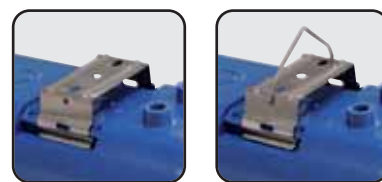

- ⊕ ELEKTRONISCH DIMBAAR TOT 1%
- ⊕ ZEER ENERGIE ZUINIG
- ⊕ IDEEAAL VOOR GROTERE RUITES EN ALS HOOFDVERLICHTING
- ⊕ ZEER WATERDICHT (IP65)
- ⊕ EENVOUDIGE MONTAGE AAN MUUR, PLAFOND OF HANGEND

- ⊕ ELECTRONIC DIMMABLE DOWN TO 1%
- ⊕ MAXIMUM ENERGY SAVING
- ⊕ IDEAL FOR MAIN LIGHTING
- ⊕ WATERTIGHT (IP65)
- ⊕ EASY INSTALLATION (WALL OR PENDANT)



- Stabiel armatuur met RVS clips. Kleur blauw.
- Energiezuinig hoogfrequent elektronisch voorschakelapparaat (220-240 VAC)
- Dimbaar (1-10VDC) (niet dimbaar is ook leverbaar)
- Heldere ammoniak bestendige PMMA (acrylglas) kap
- Geleverd met IP67 wurgwartels en RVS montage clips
- 5 polige aansluiting voor dimbare versie

- Stable, blue-coloured fitting with INOX cover clips
- Energy saving electronic ballast 220-240 VAC (high frequent)
- Dimmable (1-10 V) and not dimmable type
18 W, 36 W or 58 W available
- Cover of acrylglass PMMA (ammonia resistant)
- Delivered with IP67 cable glands and INOX mounting clips
- 5 wire connecting in dimmable version

Accessoires | Accessories



- Handdraai dimmer, EBP-AP | Brightness adjuster pot
- Zonlicht simulator, SLS-1 | Sunlight simulator controller
- Zonlicht simulator met interne schakelklok, SLS-4 | Sunlight simulator controller with internal clock
- Signaalversterker voor computer, IAC-1 | Interface amplifier for PC controlling
- TL lampen in verschillende kleuren, TLC-136 | Fluorescent tubes with different colours
- Externe schakelklokken | external switch clocks
- Verschillende regel systemen | individual controller panels



Type	Watt	L (mm)	W (mm)	H (mm)	kg
HWDK-C 18ED	1 x 18	670	102	110	1,5
HWDK-C 36ED	1 x 36	1274	102	110	2,5
HWDK-C 58ED	1 x 58	1574	102	110	2,6
HWDK-C 18E	1 x 18	670	102	110	1,5
HWDK-C 36E	1 x 36	1274	102	110	2,5
HWDK-C 58E	1 x 58	1574	102	110	2,6